


MS-98E6

3.5" SBC with Intel® Apollo Lake/Apollo Lake-I for Fanless, Ultra Low-Power, High-Performance & Wide Temperature Solution

NEW

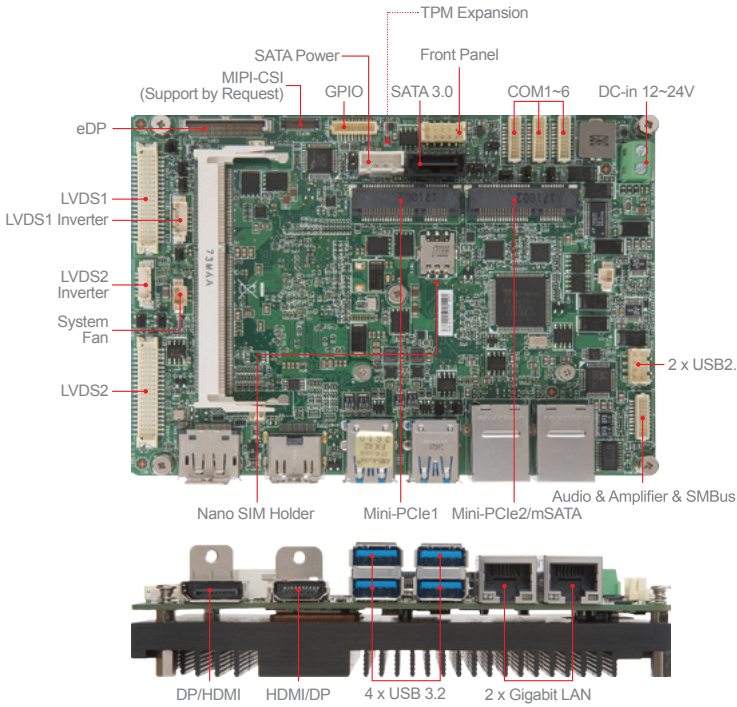

Features

- Intel® Apollo Lake/Apollo Lake-I Series SoC
- DDR3L 1866/1600 MHz SODIMM Slot up to 8GB
- Triple independent displays: DP, HDMI, LVDS(eDP by option)
- 2 GbE LAN with RJ-45
- 1 Mini-PCle (Full size, with mSATA), 1 Mini-PCle (Full size, with Nano SIM Holder) Slots
- SATA 3.0, Micro SD for storage
- 4 USB 3.2 Gen 1, 2 USB 2.0, 6 COM (1 RS-485), GPIO, Audio
- Wide operating temperature : -40 ~ 85°C
- Wide Voltage DC-IN 12~24V
- MIPI-CSI 2.0 interface for Camera

Ordering Information

Part Number	Description
919-98E6-007	MS-98E6/609-98E6-180/809-98E6-007 VER12 OPT.A Intel Apollo Lake-I E3950,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, WT
919-98E6-008	MS-98E6/609-98E6-190/809-98E6-007 VER12 OPT.B Intel Apollo Lake-I E3940,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, WT
919-98E6-009	MS-98E6/609-98E6-200/809-98E6-007 VER12 OPT.B Intel Apollo Lake-I E3930,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, WT
919-98E6-010	MS-98E6/609-98E6-210/809-98E6-008 VER12 OPT.D Intel Apollo Lake-I E3940,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, Non-WT
919-98E6-011	MS-98E6/609-98E6-220/809-98E6-008 VER12 OPT.E Intel Apollo Lake N4200,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, Non-WT
919-98E6-012	MS-98E6/609-98E6-230/809-98E6-008 VER12 OPT.F Intel Apollo Lake N3350,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, Non-WT
919-98E6-013	MS-98E6/609-98E6-240/809-98E6-008 VER12 OPT.G Intel Apollo Lake J3455,F1,DDR3L SO DIMM+DP+HDMI+2LVDS+eDP+2Mini-PCle+2LAN+SATA3.0+4USB3.0+2USB 2.0+6COM+MIPi+Micro SD, DC 12V~24V, Non-WT

Packing List

Part Number	Description	Quantity
K1B-3008034-V03	USB Cable, 150mm	1
K1D-1012064-V036	SATA Cable with Power, 200mm	1
K14-3018001-V03	COM PORT Cable, 150mm	1
K1G-3002031-V03	DC Power Cable, 150mm (For 919-98E6-007/008/009)	1
K1G-3004069-V03	DC Power Cable, 150mm (For 919-98E6-010/011/012/013)	1
G71-SEDC209-N56	Driver DVD	1

Specifications

		Apollo Lake SKUs	Apollo Lake-I SKUs
Processor	CPU	Intel® Pentium® Processor N4200, QC, 6W Intel® Celeron® Processor N3350, DC, 6W Intel® Celeron® Processor J3455, QC, 10W	Intel® Atom™ x7 Processor E3950, QC, 12W Intel® Atom™ x5 Processor E3940, QC, 9.5W Intel® Atom™ x5 Processor E3930, DC, 6.5W
	Frequency	N4200, 1.1 GHz, up to 2.5 GHz N3350, 1.1 GHz, up to 2.4 GHz J3455, 1.5 GHz, up to 2.3 GHz	E3950, 1.6 GHz, up to 2.0 GHz E3940, 1.6 GHz, up to 1.8 GHz E3930, 1.3 GHz, up to 1.8 GHz
	L2 Cache	1M~2M (Depends on CPU)	
	CPU Type	BGA	
Memory	Chipset	Integrated in SoC	
	BIOS	AMI	
	Technology	Single-channel DDR3L 1866/1600 MHz	
Memory	Max. Capacity	Up to 8GB	
	Socket	1 x 204-pin SO-DIMM	
Memory	Controller	Intel® HD Graphics	
	Graphic Memory	Depends on CPU	
Display	LVDS	2 x Dual Channel 18/24-bit (LVDS1 Share with eDP Signal, LVDS2 Share with DP1 Signal)	
	eDP	1 (Share with LVDS1 Signal)	
	VGA	N/A	
	DVI	N/A	
	HDMI	1(HDMI1 Co-layer DP1/LVDS2 & HDMI2 Co-layer DP2 by option)	
	DisplayPort	1(DP1 Co-layer HDMI1/LVDS2 & DP2 Co-layer HDMI2 by option)	
	Multiple Display	3 independent displays	
Display Interface	LVDS1/LVDS2	up to 1920 x 1200 @60Hz	
	eDP	up to 4096 x 2160 @60Hz	
	HDMI1/HDMI2	up to 3840 x 2160 @30Hz DP1/DP2 up to 4096 x 2160 @60Hz	
Ethernet	Controller	2 x Intel® I211-AT GbE LAN	2 x Intel® I210-IT GbE LAN
Audio	Controller	Realtek® ALC887-VD2-CG HD Audio Codec	
Super I/O	Controller	Fintek F81867AD-I	
H/W Monitor	Watchdog Timer	256-level Watchdog Timer	
	Smart Fan	Yes	
TPM	Controller	Pin header	
I/O Interface	USB	2 x USB 2.0 (internal) 4 x USB 3.2 Gen 1 (rear)	
	Serial	6 x COM ports (Internal) COM1: RS-232/422/485, 0V/5V/12V, support auto flow control COM2~6: RS-232, 0V/5V/12V (RS-422/485 by Optional)	
	Parallel	N/A	
	PS/2	N/A	
	GPIO	16-bits (8 x GPI; 8 x GPO), 5V	
Expansion Slot	PCle x16	N/A	
	PCI	N/A	
	M.2	N/A	
	Mini-PCle	2 x Full-size (Mini-PCle1 Slot w/ NANO SIM-Holder) (Mini-PCle2 Slot w/ mSATA)	
Storage	SATA	1 x SATA 3.0	
	mSATA	1 (Shared with Mini-PCle2)	
Power Supply	DC	DC-in 12~24V (Box header with 4pin)	DC-in 12~24V (Phoenix connector with 2pin)
	ATX	N/A	
Environment	Operating Temperature	-10 ~ 60°C	-40 ~ 85°C
	Operating Humidity	10 ~ 90%, non-condensing	
	Storage Temperature	-20 ~ 80°C	-40 ~ 85°C
	Storage Humidity	10 ~ 90%, non-condensing	
Form Factor	Dimensions	146 x 102mm (3.5")	
	Weight	0.34 kg	0.59 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI	
Software Platform	OS Support	Windows 10 IoT Enterprise (64-bit, RS5) Linux Fedora 25 (by request) Linux Ubuntu 16.04 (by request)	
		*1 x MIPI-CSI 2.0 (by request) *1 x microSD slot	

Optional Item

Part Number	Description
E31-0805840-K08	Heatspreader (For Apollo Lake-I)
E31-0805850-K08	Heatspreader (For Apollo Lake)